


Large capacity Regulated DC Power Supply

PDY Series

- Phase control method CV/CC power supply
- Remote sensing function
- Monitor out
- GP-IB/RS-232C interfaces(Factory option)
- High accuracy setting for voltage and current using 10 revolution volume
- Remote control conformity
- Protection function for OVP, OHP and OCP

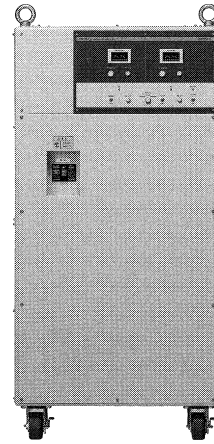

Model Name	Output		CV(constant voltage)characteristics			constant current)characteristics		Input AC200V(±10%)		Others			
	CV	CC	Ripple	Line regulation	Load regulation	Line regulation	Load regulation	No. of phase	Input capacity	Dimensions:			Weight
	V	A	mVrms	mV	mV	mA	mA		kVA	Wmm	Hmm	Dmm	kg(Approx.)
PDY8-300	0-8	0-300	5	3.4	3.4	160	160	3	5.5	600	1,206	700	240
PDY8-500	0-8	0-500	5			260	260	3	9	600	1,406	700	350
PDY8-1000	0-8	0-1000	5			510	510	3	18	-	-	-	-
PDY35-100	0-35	0-100	1	4.75	4.75	60	60	1	7	430	770	600	160
PDY35-200	0-35	0-200	3			110	110	3	12	600	1,206	700	260
PDY35-300	0-35	0-300	5			160	160	3	18	600	1,406	700	350
PDY35-400	0-35	0-400	5			210	210	3	24	-	-	-	-
PDY35-500	0-35	0-500	5			260	260	3	30	700	1,406	850	550
PDY35-600	0-35	0-600	5			310	310	3	42	-	-	-	-
PDY35-700	0-35	0-700	5			360	360	3	49	-	-	-	-
PDY35-800	0-35	0-800	5			410	410	3	56	850	1,692	1,100	950
PDY35-900	0-35	0-900	5			460	460	3	63	-	-	-	-
PDY35-1000	0-35	0-1000	5			510	510	3	70	-	-	-	-
PDY35-1200	0-35	0-1200	5			610	610	3	84	-	-	-	-
PDY35-1500	0-35	0-1500	5			760	760	3	105	-	-	-	-
PDY35-2000	0-35	0-2000	5			1010	1010	3	140	-	-	-	-
PDY35-5000	0-35	0-5000	5			2510	2510	3	350	-	-	-	-
PDY60-100	0-60	0-100	1			6	6	60	60	1	13	500	970
PDY60-200	0-60	0-200	3	110	110			3	21	600	1,406	700	370
PDY60-300	0-60	0-300	5	160	160			3	31	650	1,406	850	540
PDY60-400	0-60	0-400	5	210	210			3	41	-	-	-	-
PDY60-500	0-60	0-500	5	260	260			3	51	750	1,706	850	800
PDY60-600	0-60	0-600	5	310	310			3	72	-	-	-	-
PDY60-700	0-60	0-700	5	360	360			3	84	-	-	-	-
PDY60-800	0-60	0-800	5	410	410			3	96	-	-	-	-
PDY60-900	0-60	0-900	5	460	460			3	108	-	-	-	-
PDY60-1000	0-60	0-1000	5	510	510			3	120	-	-	-	-
PDY110-200	0-110	0-200	5	8.5	8.5	110	110	3	37	-	-	-	
PDY150-50	0-150	0-50	8	10.5	10.5	35	35	3	15	-	-	-	-
PDY150-100	0-150	0-100	8			60	60	3	30	-	-	-	-
PDY200-50	0-200	0-50	10			35	35	3	20	-	-	-	-
PDY200-100	0-200	0-100	10	13	13	60	60	3	40	-	-	-	-
PDY200-200	0-200	0-200	10			110	110	3	80	-	-	-	-
PDY200-1000	0-200	0-1000	10			510	510	3	400	-	-	-	-
PDY300-35	0-300	0-35	15	18	18	28	28	3	21	-	-	-	-
PDY300-100	0-300	0-100	15			60	60	3	60	900	1,706	900	650
PDY300-200	0-300	0-200	15			110	110	3	120	1,600	1,850 ¹	900	970
PDY300-300	0-300	0-300	15			160	160	3	180	1,700	2,050 ¹	1,000	1,210
PDY300-1000	0-300	0-1000	15			510	510	3	600	-	-	-	-
PDY400-100	0-400	0-100	20	23	23	60	60	3	80	1,200	1,650 ¹	900	770
PDY400-150	0-400	0-150	20			85	85	3	120	-	-	-	-
PDY400-200	0-400	0-200	20			110	110	3	160	-	-	-	-
PDY500-30	0-500	0-30	30	28	28	25	25	3	30	-	-	-	-
PDY500-50	0-500	0-50	30			35	35	3	50	-	-	-	-
PDY500-100	0-500	0-100	30			60	60	3	100	1,400	1,650 ¹	900	880
PDY600-20	0-600	0-20	40	33	33	20	20	3	24	600	1,406	700	370
PDY600-30	0-600	0-30	40			25	25	3	36	650	1,406	900	470
PDY600-40	0-600	0-40	40			30	30	3	48	750	1,706	900	560
PDY600-50	0-600	0-50	40			35	35	3	60	900	1,706	900	650
PDY600-100	0-600	0-100	50			60	60	3	120	1,600	1,650	900	1,280
PDY600-200	0-600	0-200	50			110	110	3	-	-	-	-	-

● Environment conditions/Cooling method: Forced air cooling . Operating temperature: 0°C~40°C. Operating humidity: 30%~85%RH
¹ Height including chamber base(not including caster) ² Dimensions and weight may change without notice